

# AVM-1040 DS

## 10,4" TFT LCD Digital Signage



### AVM-1040 DS Features

- High contrast color TFT LCD display support resolution up to 800 x 600. Compatible with IBM VGA, VESA standards
- Support DCC 1/2B Plug&Play compatibility
- Advanced OSD control for picture quality adjustment
- NTSC/PAL/SECAM video systems compatible
- Stable photo frame stand base
- VESA mounting
- RoHS compliance


### AVM-1040 DS Optional Accessories

- Resistive touch solutions
- Anti-Glare/Anti Reflective tempered glass
- High Brightness Panel (400 cd/m<sup>2</sup>) solution
- Sunlight Readable

<b>AVM-1040 DS Specifications</b>	
<b>LCD Display</b>	10,4" TFT active matrix panel
<b>Pixel Pitch</b>	0,264 (H) x 0,264 (V) mm
<b>Max. Resolution</b>	SVGA 800 x 600
<b>Contrast Ratio</b>	400:1 (typical)
<b>Brightness</b>	250 cd/m <sup>2</sup> (typical)
<b>Response time (Tr+Tf)</b>	25 ms (typical)
<b>Display Color</b>	262K
<b>Effective Display Area</b>	211,2 (H) x 158,4 (V)
<b>Viewing Angle (CR&gt;10)</b>	130° (H) x 110° (V) (typical)
<b>Backlight</b>	CCFL x 1 (typical)
<b>Lamp Life (hr)</b>	30,000 (minimum)
<b>Stand Base</b>	Tilt down: 0°, Tilt up: +26°
<b>Input Signals</b>	Analog
<b>Signal Connector</b>	Analog: D-sub 15 pin (VGA) Digital: N/A Video-In: Composite Video, S-Video (option)
<b>Scan Frequency</b>	60/70/72/75 Hz
<b>Audio System</b>	1W / per channel driver
<b>Touch Panel</b>	Resistive RS232 or USB A type (option)
<b>Key Control</b>	Power on/off with LED, Menu, Select, Adjustment (+,-)
<b>Operation Condition</b>	Temperature: 0°C - 40°C (32°F - 104°F) Humidity: 20% - 80% (no condensation) Altitude: Top 10,000 feet
<b>Storage Condition</b>	Temperature: -20°C - 60°C (-4°F - 140°F) Humidity: 10% - 90% (no condensation)
<b>Power</b>	Universal power adaptor Input AC 100 ~ 240V, 50 ~ 60Hz; Output DC 12V / 3A, 36W
<b>Dimensions (WxHxD)</b>	278 x 242 x 116 mm
<b>Carton Dimensions (WxHxD)</b>	432 x 310 x 117 mm
<b>Weight</b>	1,64 Kg
<b>Certification</b>	C-UL, UL, FCC, CE

Specifications are subject to change without notice.

**AVM-1040 DS I/O Ports**

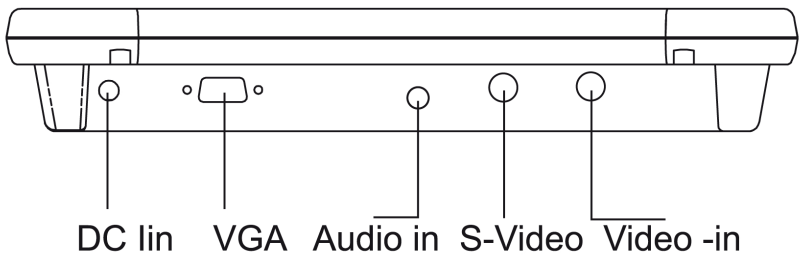

**AVM-1040 DS Mechanical Drawing**

